


For further information: BERRIMAN ASSOCIATES 1-800-480-3630

RSU Space Saver™ Series www.berriman.com Mixed Media – Combination Odor and Particulate Controllers

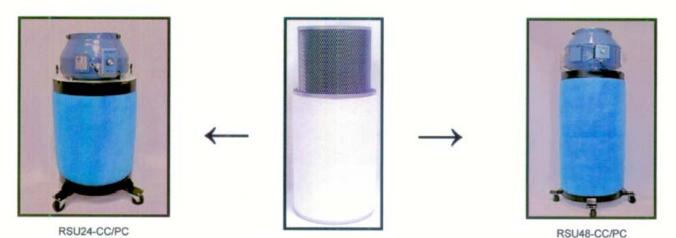

Multi-stage inner filtration

The **Mixed Media** Combination Odor and Particulate Controller is designed to remove gases and odors as well as particulate as small as mold spores and bacteria from your indoor air. It has a 360 degree air-in draw and is efficient in removing approximately 90% of gases/odors and 99.24% of airborne particulate phase contaminants at .3 microns per air pass. The CC/PC uses a **Three Stage Filtration** process. The **First Stage** filters the air of dust particulate down to 10 microns in size via a pre-filter. The **Second Stage** contains a two-stage, double-layered electrostatically charged fiber cartridge that is 99.24% efficient at capturing particulate down to 3 microns. The **Third Stage** is a deep bed Virgin

pass. The CC/PC uses a **Three Stage Filtration** process. The **First Stage** filters the air of dust particulate down to 10 microns in size via a pre-filter. The **Second Stage** contains a two-stage, double-layered electrostatically charged fiber cartridge that is 99.24% efficient at capturing particulate down to .3 microns. The **Third Stage** is a deep bed Virgin Coconut Carbon filter that is superior at capturing VOCs and other gases and odors from the air. The scrubbed air is ejected out the top of the unit to the ceiling to create a room-wide ceiling to floor laminar air flow pattern that is key to maintaining the highest quality indoor air.

Air Flow and Mechanical:	RSU24-CC/PC	RSU48-CC/PC
Air flow rate (speed controllable)	250-800	500-1600
Replaceable pre-filter captures particles to 10 microns	yes	yes
Replaceable particulate filter – captures to .3 microns	yes	yes
Carbon cartridge refillable or disposable	yes	yes
Casters allow easy placement and removal	yes	yes
Electrical:		
UL/CSA listed blower	1	1
Continuous duty rated – run 24 hours	yes	yes
Internal thermal protection	yes	yes
Power cord length - ft.	6	6
Voltage - VAC: 115/60Hz or 220/50Hz	yes	yes
Amps, full load	3.3	4.8
Dimensions and Weights:		
Height	39.5"	71"
Diameter	20"	20"
Carbon reservoir content (carbon #100)	50 lbs.	100 lbs.
Operating weight (with fresh carbon)	115 lbs.	205 lbs.
Shipping weight (with carbon and pallet)	185 lbs.	330 lbs.
Sound level (at one meter on highest speed)	70 dB	70 dB

electrocorp does not warrant, expressed or implied, our products to be medical devices. We do not claim or warrant, expressed or implied, that they are intended to prevent or reverse any medical condition that a user of this equipment may have. We do not guarantee or warrant, expressed or implied, our equipment to protect an individual from contracting any particular disease or illness.